


# SILCOR<sup>®</sup> 900MP

Rapid-set, spray-applied, liquid waterproofing membrane for podium decks, green roofs and terraces.

## Product Description

SILCOR<sup>®</sup>900MP is a premium performance, two-component, spray-applied, seamless waterproofing membrane that cures within two minutes to form a high-strength, elastomeric and fully-bonded waterproof membrane. SILCOR<sup>®</sup> 900MP is extremely durable, with excellent wear and chemical\* resistance, and does not normally require additional protection against mechanical damage.

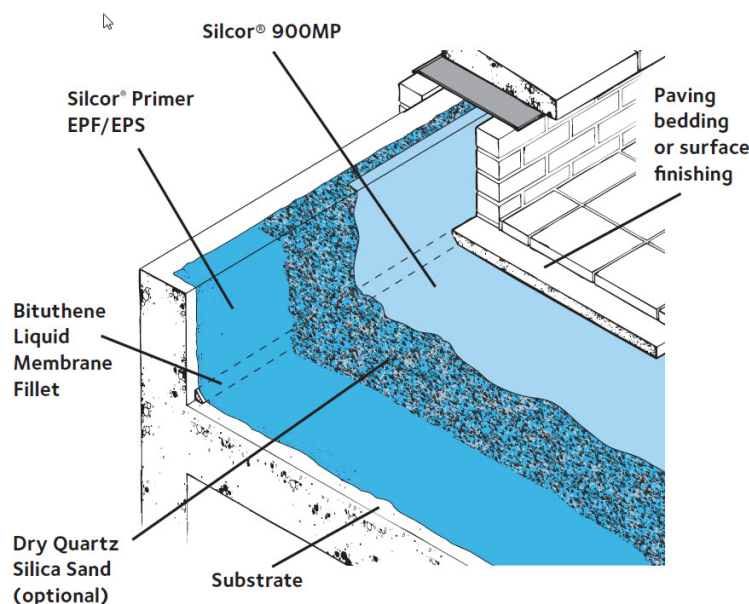

Details shown are typical illustrations only and not working drawings. For assistance with working drawings and additional technical advice please contact GCP Technical Services

## Product Advantages

- Fast Cure – Will accept foot traffic after two minutes.
- Seamless – Continuous waterproofing integrity.
- Productivity – Spray-applied for maximum coverage per day.
- Fully bonded – Resists water tracking beneath the membrane.
- Non-flammable
- Low Odor – Low VOC.
- Elastomeric – Accommodates movements and bridges concrete shrinkage cracks.
- Durable – Tough, with excellent wear and damage resistance.
- Chemical Resistance\*

## Principal Applications

New and remedial waterproofing for:

- Plaza decks
- Split slabs
- Green roofs
- Planters
- PRMA

## Design

The SILCOR®900MP spray-applied waterproofing system is designed for use as a fully adhered waterproofing layer on new and existing elevated structural decks. Best practice is to slope structural decks to drain a minimum of 1/8 in./ft.

## System Components

- SILCOR® 900MP – Premium performance, two-component, spray-applied seamless waterproofing membrane.
- SILCOR® Primer EPF – Two-component epoxy primer (for temperatures 40°F–80°F).
- BITUTHENE® Liquid Membrane – Two-component elastomeric, liquid-applied detailing accessory.
- SILCOR® Top Coat 70 – Two-component aliphatic urethane for permanently exposed upturns and flashings.
- PREPRUFE® Tape – Reinforced, pressure-sensitive tapes for detailing.

## Installation

SILCOR®900MP liquid waterproofing should only be applied by experienced, trained contractors. Effective liquid waterproofing application starts with a good surface preparation of the substrate.

### Surface Preparation

All grease, curing agents, oil or other contaminants that can affect adhesion of the membrane to the surface need to be removed prior to application. Grease, dirt and grime can be removed using high-pressure water cleaning, provided sufficient time is allowed for the residual humidity and water to dissipate. Sandblasting is not effective on contaminated concrete. After cleaning, the surface needs to be prepared to open the pores and make the surface ready to accept the primer. The preferred and most common method is sand or grit blasting.

Concrete must be allowed to cure for at least 28-days. Concrete should have at least a 115 psi cohesive strength. Concrete surface moisture content must be less than 5% prior to application of SILCOR®primers. Moisture content must be checked using appropriate meters and test methods.

### Priming

Priming should be completed prior to applying SILCOR®900MP.

- Add the complete B-component to the A-component to ensure a correct mixing ratio.
- Mix with a slow turning mixer (less than 300 rpm) for three minutes in order to obtain a homogeneous mixture.
- Apply primers to the surface by brush or roller, immediately mixing.
- Pour the primer onto the surface in a zigzag trail.
- After pouring onto the surface, the primer is evenly distributed onto the surface with foam rubber squeegees and rolled using Perlon rollers.
- The primer should be evenly distributed at 10-mils thickness with complete coverage of the surface. If the surface is very porous and absorbs primer to the extent that the primer is less than 10-mils thick, additional primer should be added in this area within the pot life or recoat time of the primer. Heat is generated when components A and B are mixed. Care should be taken if excess material is left in the mixing container and not distributed onto the surface.
- The SILCOR<sup>®</sup> membrane should be applied after initial primer curing but within 24-hours. This window is influenced by ambient temperature and humidity. IF this time is exceeded before the membrane is applied, re-apply a new layer of SILCOR<sup>®</sup> primer.
- The SILCOR<sup>®</sup> membrane's application window using SILCOR primers can be extended by broadcasting dry quartz silica sand into the primed surface. Broadcast sand to full saturation. Use sand of 20/30 mesh for a coating thickness of up to 80-mils. For larger coating thicknesses, larger grain sizes can be used. Remove surplus sand and partially bonded particles with a scrubber after the primer is dry to the touch.

For complete descriptions and instructions on using SILCOR<sup>®</sup> primer, consult separate technical data sheets.

## Spray Equipment and Temperature

SILCOR<sup>®</sup> membranes are rapid setting, high performance materials designed to be used with high-pressure proportioners such as Graco<sup>®</sup> Reactor E-XP2, H-XP2, and H-XP3 or similar high-pressure plural component spraying equipment. Both Part A and Part B components are supplied directly from drums with diaphragm or T-pumps, ensuring a continuous flow of material to the machine. Due to the high reactivity of the system, components are kept separately until they reach the spray gun mixing chamber. The components are designed for a 1:1 mixing ratio by volume. The 1:1 volume mixing ratio shall be maintained at a tolerance of +/- 2%. See your equipment manufacturer for appropriate air compressor and electrical power specifications and settings.

Substrate temperature must be between 40°F and 175°F and exceed the dew point temperature by a minimum of 5°F.

SILCOR<sup>®</sup> resin (Part B) components are pigmented and need to be mixed before application with an air driven corkscrew-type mixer or similar. Mix at low speed to avoid air entrapment until a homogeneous color is obtained. After mixing, keep the Part B component agitated using a slow turning mixer in the drum during spray application using the 3-bung lid. SILCOR<sup>®</sup> isocyanate (Part A) components are supplied ready to use and do not need pre-mixing.

Both Part A and B are moisture-sensitive and need to be protected from all sources of moisture.

## SILCOR® 900MP Spray Application

SILCOR® membranes are sprayed multi-directional (up-down / left right) in several passes to obtain uniform coverage and membrane thickness. Hold the gun perpendicular to the substrate at a distance of 24 to 36 inches. When applying, care is required at the overlap to ensure even coverage of the overlap area. Spray-applied SILCOR® membranes should be applied at a minimum thickness of 80-mils. In order to achieve uniform membrane thickness, a smooth and constant gun speed is required by the gun operator.

## Laps

When applying the SILCOR® membrane over previously installed and cured SILCOR® membrane, wait 24 hours before application. Abrade using mechanical means ( a minimum of 6 inches) onto the existing SILCOR®, solvent wipe the abraded area and lap the new SILCOR® membrane over the area. When a visible color change after exposure has occurred, a level of mechanical abrasion is required to reveal the original color of the SILCOR® membrane prior to solvent wiping and lapping the new SILCOR® membrane.

## Repairs

Any damaged or unbonded SILCOR® membrane should be removed to expose the original substrate and SILCOR® primer. The existing SILCOR® membrane should be abraded at a minimum 6 inches past the damaged area in all directions, including any SILCOR® primer that is remaining on the exposed substrate. Abrading must reveal the original color of the SILCOR® membrane. Solvent wipe the prepared areas and apply SILCOR® primer only to exposed portions of the substrate. After the SILCOR® primer cures, clean the surrounding abraded SILCOR® membrane with solvent and immediately after, flash off installation of the new SILCOR® membrane should occur (ensuring it extends a minimum of 6 inches onto the abraded, pre-existing SILCOR® membrane. It is recommended that the perimeter of the repair area be taped off to provide a clean termination at the required 80-mil thickness.

## Detailing

For complete detailing instructions, refer to SILCOR®900MP standard details.

## Chemical Resistance

\*SILCOR®900MP offers protection against a wide range of chemicals. Contact GCP for specific details and recommended applications.

## Limitations

Apply SILCOR®900MP directly to structural surfaces. Do not apply SILCOR®900MP over lightweight insulating concrete. Insulation, if used, must be installed over the membrane.

The SILCOR® membrane is not intended for permanent exposure. SILCOR®900MP liquid waterproofing, at recommended thickness, can be exposed for a maximum of 180-days prior to overburden installation. If exposure time is expected to exceed the recommended duration, the SILCOR® membrane must be temporarily protected until overburden is installed.

When used in PRMA assemblies where small portions will be left exposed (such as vertical upturns, flashings, etc.), SILCOR® top coat 70 is to be installed within 24-hours of the initial SILCOR® installation.

SILCOR® 900HA should not be used with SILCOR® 900MP. If repairs to SILCOR® 900MP cannot be completed with SILCOR® 900MP, please contact your local GCP technical representative.

SILCOR® membrane temperature should exceed the dew point temperature by a minimum of 5 °F prior to SILCOR® top coat 70 application.

## Safety and Handling

Read and understand the product label and safety data sheet (SDS) for each system component. All users should acquaint themselves with this information prior to working with the products and follow the precautionary statements.

## Supply

	UNIT OF SALE
SILCOR® 900MP (resin)	400 lb - 55 gal drum
SILCOR® 900MP (iso)	495 lb - 55 gal drum
SILCOR® Primer EPF (Part A)	7.1 lbs pail - approx. 0.7 gal
SILCOR® Primer EPF (Part B)	4.0 lbs pail - approx. 0.5 gal
Storage	Store between 40 °F & 80 °F
Shelf life - SILCOR® 900MP	12 months

## Physical Properties

	TYPICAL VALUE	TEST METHOD
Tensile Strength	4090 psi	ASTM D412
Tear Resistance	487 lb/in.	ASTM D751
Adhesion to concrete	479 psi <sup>1</sup>	ASTM D4541
Low Temperature crack bridging	Pass	ASTM C836
Shore Hardness	91A	ASTM 2240

### Footnotes:

1. Tested on prepared, primed, and sand blended concrete or steel.
2. H18/1000 cycles/1000g

## Liquid Properties

	TYPICAL VALUE	TEST METHOD
Viscosity - resin	400-600 cps <sup>1</sup>	Brookfield Viscometer
Viscosity - iso	800-1200 cps <sup>1</sup>	Brookfield Viscometer
Density (Resin, Iso)	8.6 lb/gal 9.2 lb/gal	ASTM D4541
Coverage Rate (80 mil thickness)	16.4 ft <sup>2</sup> /gal 1800 ft <sup>2</sup> /kit	internal
Gel time	5 sec <sup>1</sup>	internal
Tack free time	8 sec <sup>1</sup>	internal
Trafficable (foot traffic)	2 mins. <sup>1</sup>	internal

### Footnotes:

1. Measured at 77°F

All declared values shown in this data sheet are based on test results determined under laboratory conditions and with the product sample taken directly from stock in its original packing without any alteration or modification of its component parts.

**gcpat.com | North America customer service: 1-866-333-3726**

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

BITUTHENE, PREPRUFE, SILCOR is a trademark, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2018 GCP Applied Technologies Inc. All rights reserved.

GCP Applied Technologies Inc., 2325 Lakeview Parkway, Suite 450, Alpharetta, GA 30009, USA  
GCP Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

This document is only current as of the last updated date stated below and is valid only for use in the Canada. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on [www.gcpat.com](http://www.gcpat.com). Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2022-04-27

[ca.gcpat.com/solutions/products/silcor-900-series-liquid-waterproofing/silcor-900mp](http://ca.gcpat.com/solutions/products/silcor-900-series-liquid-waterproofing/silcor-900mp)